

VACUFLEX®

- [Products](#)
 - [Hoses](#)
 - [Connections](#)
 - [Brochure](#)
- [Company](#)
 - [About us](#)
 - [Sustainability](#)
 - [Code of Conduct](#)
 - [Certificates](#)
- [Service](#)
 - [VACUFLEX® Hose Academy](#)
 - [Dental hoses](#)
- [News](#)
- [Career](#)

- [Deutsch](#)
- [English](#)
- |
- [Chinese](#)

FLEXANT

Standard duty suction and delivery hose with antistatic wire

- food grade
- antistatic wire for grounding
- smooth bore

MEDIUM



PROPERTIES



Structure:

Food grade transparent orthophthalate-free PVC wall, with rigid PVC helix & copper braid

Characteristics:

Standard duty suction and delivery hose with antistatic wire for grounding. Food grade according to EU 10/2011 Class A/B/C - Orthophthalate-free

Applications:

Designed for standard duty suction and delivery of liquids and low abrasion materials

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

compatible with PVC, such as powder, pellets, wood chips, liquids for food industries, where static discharge via a copper wire is required

Temperature range:

-5°C up to +60°C

Colour:

Transparent, ivory helix

Specials:

Flexant RG: Industrial version with ECO PVC

Group 120: With food grade PU inner lining

I.D. Ø mm	O.D. Ø mm	r(mind.) mm	Weight ca. kg/m	Vacuum mbar	Pressure	Part no.
30	36	125	390	760	5	5135030000/998
32	38,2	130	410	760	5	5135032000/998
35	41,5	150	475	760	5	5135035000/998
38	44,8	160	540	760	5	5135038000/998
40	47,2	180	570	760	4	5135040000/998
45	52,6	210	640	760	4	5135045000/998
51	58	230	770	760	4	5135051000/998
55	63,2	250	840	760	4	5135055000/998
60	68,5	270	930	760	4	5135060000/998
63	71,7	280	960	760	4	5135063000/998
70	79,3	300	1200	760	3	5135070000/998
76	84,5	340	1350	760	3	5135076000/998
80	90,4	370	1490	760	3	5135080000/998
90	101	405	1760	760	2	5135090000/998
102	112,2	450	2000	760	2	5135102000/998
120	132,5	550	2880	700	2	5135120000/998

Further diameters upon request

State: 30.11.2022

Contact

VACUFLEX GmbH

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

Hessenring 8 -12
64546 Mörfelden-Walldorf
Germany


T +49 6105 9339 0
F +49 6105 9339 60
info@vacuflex.de

[Imprint](#)
[Data privacy](#)
[Terms of Use](#)



VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

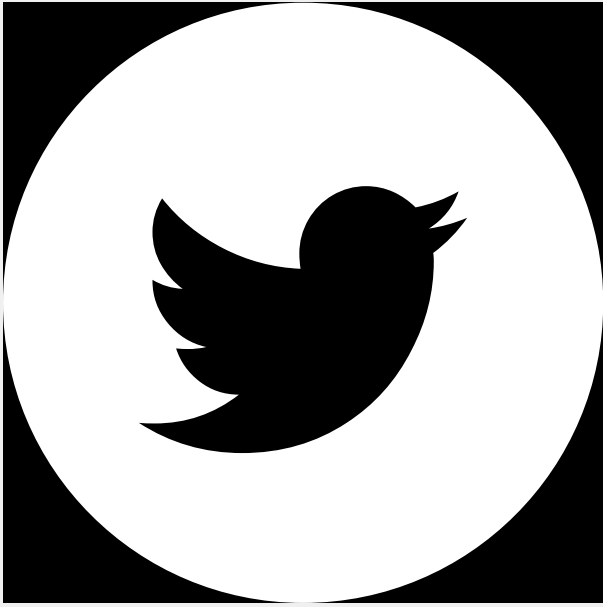



•
VACUFLEX Advanced Hoses Ltd.

Room 101 of F Building No.2,
Xingye Road, Jiuwangmiao Village,
Zip code 511458, Nansha District,
Guangzhou, China

T +86 20 846 852 37

F +86 20 390 053 10

info@vacuflex.cn

www.vacuflex.cn

Changxing VACUFLEX Hose Technology Co., Ltd

Sino-German International Industrial Zone,
Changxing Economic and Technological
Development Zone,
Zip code 313100, Changxing, Huzhou City,
Zhejiang Province, China

T +86 572 6666208

M +86 135 6025 2608

F +86 572 6666207

info@vacuflex.cn

www.vacuflex.cn

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022







Management
System
ISO 9001:2015

www.tuv.com
ID 9000009721

 **SCHAUBURG** HOSE TECHNOLOGY GROUP

© 2022 VACUFLEX GmbH

- [Products](#)
 - [Hoses](#)
 - [Connections](#)
 - [Brochure](#)
- [Company](#)
 - [About us](#)
 - [Sustainability](#)
 - [Code of Conduct](#)
 - [Certificates](#)
- [Service](#)
 - [VACUFLEX® Hose Academy](#)
 - [Dental hoses](#)
- [News](#)
- [Career](#)
- [Imprint](#)
- [Data privacy](#)
- [Terms of Use](#)
- [404](#)
-  [de](#)
-  [en](#)
- [CN](#)



VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022