

# VACUFLEX®

- [Products](#)
  - [Hoses](#)
  - [Connections](#)
  - [Brochure](#)
- [Company](#)
  - [About us](#)
  - [Sustainability](#)
  - [Code of Conduct](#)
  - [Certificates](#)
- [Service](#)
  - [VACUFLEX® Hose Academy](#)
  - [Dental hoses](#)
- [News](#)
- [Career](#)

- [Deutsch](#)
- [English](#)
- |
- [Chinese](#)

## K1H-XS-TPR-UL

### UL listed and highly flexible hose

- good resistance against ozone
- UL-certification
- PP-coated spring steel spiral

#### MEDIUM



#### PROPERTIES



#### Structure:

Outer bore of TPR (thermoplastic rubber), PP-coated spring steel spiral, welded to outer bore

#### Characteristics:

UL listed and highly flexible hose, high temperature stable, good chemical resistance, extreme good resistance against ozone

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022



With UL-certification (flame retardant)

**Applications:**

machinery, chemical industry, automotive industry, ventilation industry etc.

**Temperature range:**

-40°C up to +135°C (short term up to +150°C)

**Colour:**

Black

I.D. Ø mm	O.D. Ø mm	Wall thickness mm	r (mind.) mm	Weight ca. kg/m	Vacuum mbar	Pressure bar	Part no.
18	25	1,2	27,0	0,206	800	2,5	4-2406-018-00
20	27	1,2	30,0	0,227	800	2,5	4-2406-020-00
25	32	1,2	37,5	0,279	650	2,0	4-2406-025-00
26	33	1,2	39,0	0,226	650	2,0	4-2406-026-00
30	37	1,2	45,0	0,258	650	2,0	4-2406-030-00
32	39	1,2	48,0	0,274	650	2,0	4-2406-032-00
35	42	1,2	52,5	0,299	650	2,0	4-2406-035-00
38	45	1,2	57,0	0,323	650	2,0	4-2406-038-00
40	47	1,2	60,0	0,339	650	2,0	4-2406-040-00
45	52	1,2	67,5	0,380	650	2,0	4-2406-045-00
48	55	1,2	72,0	0,368	650	2,0	4-2406-048-00
50	57	1,2	75,0	0,383	550	1,5	4-2406-050-00
51	58	1,2	76,5	0,390	550	1,5	4-2406-051-00
55	62	1,2	82,5	0,420	550	1,5	4-2406-055-00
60	67	1,2	90,0	0,457	550	1,5	4-2406-060-00
63	70	1,2	94,5	0,479	550	1,5	4-2406-063-00
70	77	1,2	105,0	0,591	550	1,5	4-2406-070-00
75	83	1,2	112,5	0,632	550	1,5	4-2406-075-00
80	88	1,2	120,0	0,800	550	1,5	4-2406-080-00
90	98	1,2	135,0	0,897	550	1,5	4-2406-090-00
100	108	1,2	150,0	0,995	500	1,0	4-2406-100-00
102	110	1,2	153,0	1,014	500	1,0	4-2406-102-00
110	118	1,2	165,0	1,092	500	1,0	4-2406-110-00
120	128	1,2	180,0	1,189	500	1,0	4-2406-120-00
125	133	1,2	187,5	1,238	500	1,0	4-2406-125-00
127	135	1,2	190,5	1,258	500	1,0	4-2406-127-00

I.D. Ø mm	O.D. Ø mm	Wall thickness mm	r (mind.) mm	Weight ca. kg/m	Vacuum mbar	Pressure bar	Part no.
130	139	1,2	195,0	1,389	300	0,8	4-2406-130-00
140	149	1,2	210,0	1,497	300	0,8	4-2406-140-00
150	159	1,2	225,0	1,599	300	0,8	4-2406-150-00

Further diameters upon request.

State: 30.11.2022

## Contact

**VACUFLEX GmbH**  
Hessenring 8 -12  
64546 Mörfelden-Walldorf  
Germany


T +49 6105 9339 0  
F +49 6105 9339 60  
[info@vacuflex.de](mailto:info@vacuflex.de)

[Imprint](#)  
[Data privacy](#)  
[Terms of Use](#)



VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
[info@vacuflex.de](mailto:info@vacuflex.de) | [www.vacuflex.de](http://www.vacuflex.de)

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022

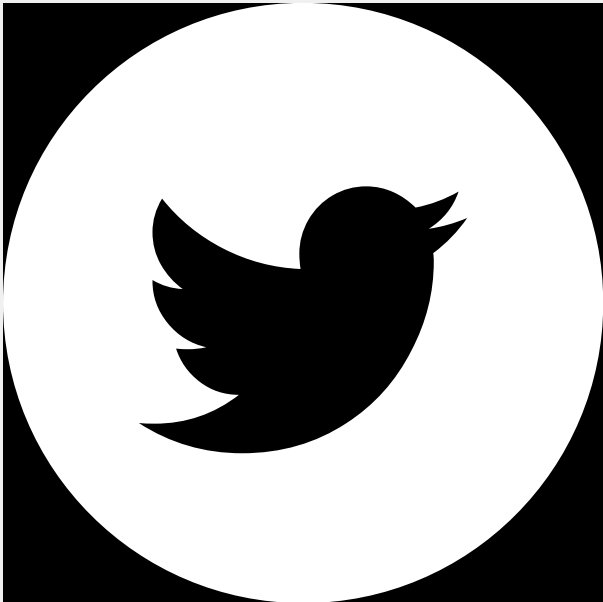

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022



VACUFLEX Advanced Hoses Ltd.  
Room 101 of F Building No.2,  
Xingye Road, Jiuwangmiao Village,  
Zip code 511458, Nansha District,  
Guangzhou, China

T +86 20 846 852 37  
F +86 20 390 053 10

[info@vacuflex.cn](mailto:info@vacuflex.cn)  
[www.vacuflex.cn](http://www.vacuflex.cn)

Changxing VACUFLEX Hose Technology Co., Ltd

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
[info@vacuflex.de](mailto:info@vacuflex.de) | [www.vacuflex.de](http://www.vacuflex.de)

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022

Sino-German International Industrial Zone,  
Changxing Economic and Technological  
Development Zone,  
Zip code 313100, Changxing, Huzhou City,  
Zhejiang Province, China

T +86 572 6666208  
M +86 135 6025 2608  
F +86 572 6666207

[info@vacuflex.cn](mailto:info@vacuflex.cn)  
[www.vacuflex.cn](http://www.vacuflex.cn)



Management  
System  
ISO 9001:2015

[www.tuv.com](http://www.tuv.com)  
ID 9000009721

SCHAUBURG HOSE TECHNOLOGY GROUP

© 2022 VACUFLEX GmbH

- [Products](#)
  - [Hoses](#)
  - [Connections](#)
  - [Brochure](#)
- [Company](#)
  - [About us](#)
  - [Sustainability](#)
  - [Code of Conduct](#)
  - [Certificates](#)
- [Service](#)
  - [VACUFLEX® Hose Academy](#)
  - [Dental hoses](#)
- [News](#)
- [Career](#)
- [Imprint](#)
- [Data privacy](#)
- [Terms of Use](#)
- [404](#)

- [de](#)
- [en](#)
- [CN](#)

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
[info@vacuflex.de](mailto:info@vacuflex.de) | [www.vacuflex.de](http://www.vacuflex.de)

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022



VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022

