

# VACUFLEX®

- [Products](#)
  - [Hoses](#)
  - [Connections](#)
  - [Brochure](#)
- [Company](#)
  - [About us](#)
  - [Sustainability](#)
  - [Code of Conduct](#)
  - [Certificates](#)
- [Service](#)
  - [VACUFLEX® Hose Academy](#)
  - [Dental hoses](#)
- [News](#)
- [Career](#)

- [Deutsch](#)
- [English](#)
- |
- [Chinese](#)

## KA-GH-PVC

Double-walled, flexible soft-PVC hose

- dental technology
- medical technology

MEDIUM



PROPERTIES



### Structure:

Double walled flexible soft PVC hose, smooth inside and outside with rigid PVC helix and a hollow chamber running parallel to the helix

### Applications:

Special hose for dental and medical appliances

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022

**Temperature range:**

- 5°C to + 60°C

**Colour:**

Light-grey, other colours on request

I.D. Ø mm	O.D. Ø mm	Wall thickness mm	r (mind.) mm	Weight ca. kg/m	Vacuum mbar	Pressure bar	Part no.
8	12	2,0	10	0,080	250	-	2-8208-008-00
11	15	2,0	13	0,090	240	-	2-8208-011-00
12	16	2,0	13	0,090	230	-	2-8208-012-00
13	17	2,0	13	0,090	230	-	2-8208-013-00
15	19	2,0	13	0,100	220	-	2-8208-015-00
16	20	2,0	20	0,120	210	-	2-8208-016-00
17	21	2,0	21	0,130	200	-	2-8208-017-00
20	25	2,5	21	0,140	180	-	2-8208-020-00
22	27	2,5	23	0,150	170	-	2-8208-022-00
25	30	2,5	23	0,190	150	-	2-8208-025-00

Further diameters upon request.

State: 30.11.2022

**Contact****VACUFLEX GmbH**

Hessenring 8 -12  
64546 Mörfelden-Walldorf  
Germany

T +49 6105 9339 0

F +49 6105 9339 60

[info@vacuflex.de](mailto:info@vacuflex.de)

[Imprint](#)

[Data privacy](#)


[Terms of Use](#)

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
[info@vacuflex.de](mailto:info@vacuflex.de) | [www.vacuflex.de](http://www.vacuflex.de)

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022





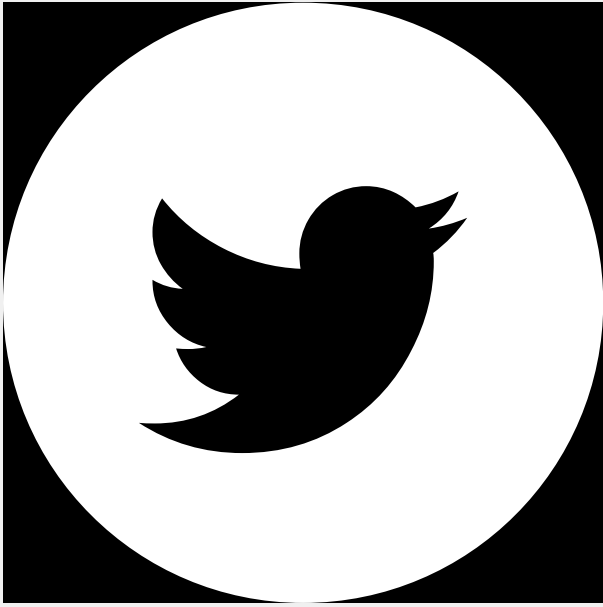

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022



•  
**VACUFLEX Advanced Hoses Ltd.**

Room 101 of F Building No.2,  
Xingye Road, Jiuwangmiao Village,  
Zip code 511458, Nansha District,  
Guangzhou, China

T +86 20 846 852 37

F +86 20 390 053 10

[info@vacuflex.cn](mailto:info@vacuflex.cn)

[www.vacuflex.cn](http://www.vacuflex.cn)

**Changxing VACUFLEX Hose Technology Co., Ltd**

Sino-German International Industrial Zone,  
Changxing Economic and Technological  
Development Zone,  
Zip code 313100, Changxing, Huzhou City,  
Zhejiang Province, China

T +86 572 6666208

M +86 135 6025 2608

F +86 572 6666207

[info@vacuflex.cn](mailto:info@vacuflex.cn)

[www.vacuflex.cn](http://www.vacuflex.cn)

VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
[info@vacuflex.de](mailto:info@vacuflex.de) | [www.vacuflex.de](http://www.vacuflex.de)

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022







Management  
System  
ISO 9001:2015

www.tuv.com  
ID 9000009721

 **SCHAENBURG** HOSE TECHNOLOGY GROUP

© 2022 VACUFLEX GmbH

- [Products](#)
  - [Hoses](#)
  - [Connections](#)
  - [Brochure](#)
- [Company](#)
  - [About us](#)
  - [Sustainability](#)
  - [Code of Conduct](#)
  - [Certificates](#)
- [Service](#)
  - [VACUFLEX® Hose Academy](#)
  - [Dental hoses](#)
- [News](#)
- [Career](#)
- [Imprint](#)
- [Data privacy](#)
- [Terms of Use](#)
- [404](#)
-  [de](#)
-  [en](#)
- [CN](#)



VACUFLEX GmbH | Hessenring 8-12  
64546 Mörfelden-Walldorf | Germany  
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60  
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)  
Stand: 11/2022