

VACUFLEX®

- [Products](#)
 - [Hoses](#)
 - [Connections](#)
 - [Brochure](#)
- [Company](#)
 - [About us](#)
 - [Sustainability](#)
 - [Code of Conduct](#)
 - [Certificates](#)
- [Service](#)
 - [VACUFLEX® Hose Academy](#)
 - [Dental hoses](#)
- [News](#)
- [Career](#)

- [Deutsch](#)
- [English](#)
- |
- [Chinese](#)

P-G-EX 1

TPE coated fabric hose with a PA Helix

- high temperature resistance
- TPE coated fabric
- wear strip profile

MEDIUM



PROPERTIES



Structure:

TPE-coated polyester fabric with black with PA-helix, white and heat stabilised, and a wear strip profile made of TPE, black

Characteristics:

Excellent chemical resistance, especially against oil and petrol fumes, crush recoverable, UV- and ozone-resistant, free of halogens and softeners

Applications:

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

Extraction of vehicle exhaust gases in over floor applications with reel systems, suction channels or on engine test benches

Temperature range:

–40°C up to + 150°C (short-term up to + 170°C)

Increased temperature resistance up to 250°C when mixed with 50% fresh air in suction process

Colour:

Black

I.D. Ø mm	Wall thickness mm	r(mind.) mm	Weight ca. kg/m	Vacuum mbar	Part no.
40	0,4	80	0,25	650	50B0040060
50	0,4	85	0,41	500	50B0050060
65	0,4	100	0,53	350	50B0065060
70	0,4	105	0,61	200	50B0070060
75	0,4	105	0,69	150	50B0075060
80	0,4	160	0,74	120	50B0080060
90	0,4	175	0,83	120	50B0090060
100	0,4	190	0,87	100	50B0100060
125	0,4	250	1,2	80	50B0125060
150	0,4	300	1,44	60	50B0150060
200	0,4	400	1,83	40	50B0200060
250	0,4	500	2,29	20	50B0250060

Further diameters upon request

State: 30.11.2022

Contact

VACUFLEX GmbH
Hessenring 8 -12
64546 Mörfelden-Walldorf
Germany

T +49 6105 9339 0
F +49 6105 9339 60
info@vacuflex.de

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

[Imprint](#)

[Data privacy](#)


[Terms of Use](#)



VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022



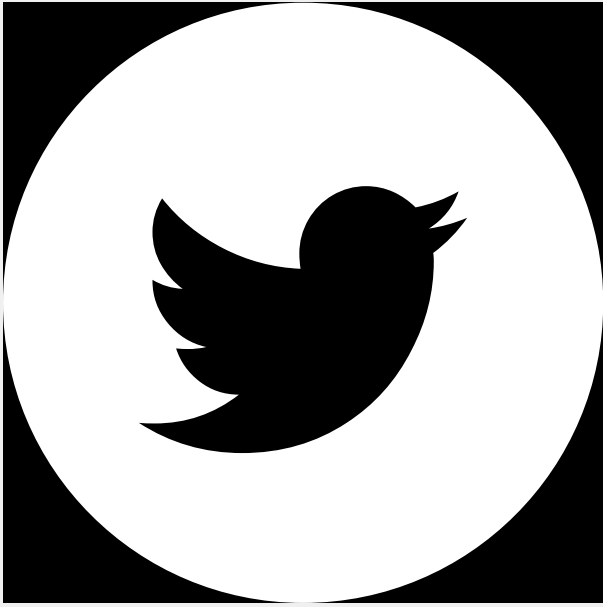

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022



•
VACUFLEX Advanced Hoses Ltd.

Room 101 of F Building No.2,
Xingye Road, Jiuwangmiao Village,
Zip code 511458, Nansha District,
Guangzhou, China

T +86 20 846 852 37
F +86 20 390 053 10

info@vacuflex.cn
www.vacuflex.cn

Changxing VACUFLEX Hose Technology Co., Ltd

Sino-German International Industrial Zone,
Changxing Economic and Technological
Development Zone,
Zip code 313100, Changxing, Huzhou City,
Zhejiang Province, China

T +86 572 6666208
M +86 135 6025 2608
F +86 572 6666207

info@vacuflex.cn
www.vacuflex.cn

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022







Management
System
ISO 9001:2015

www.tuv.com
ID 9000009721

 **SCHAUBURG** HOSE TECHNOLOGY GROUP

© 2022 VACUFLEX GmbH

- [Products](#)
 - [Hoses](#)
 - [Connections](#)
 - [Brochure](#)
- [Company](#)
 - [About us](#)
 - [Sustainability](#)
 - [Code of Conduct](#)
 - [Certificates](#)
- [Service](#)
 - [VACUFLEX® Hose Academy](#)
 - [Dental hoses](#)
- [News](#)
- [Career](#)
- [Imprint](#)
- [Data privacy](#)
- [Terms of Use](#)
- [404](#)
-  [de](#)
-  [en](#)
- [CN](#)



VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022