

VACUFLEX®

- [Products](#)
 - [Hoses](#)
 - [Connections](#)
 - [Brochure](#)
- [Company](#)
 - [About us](#)
 - [Sustainability](#)
 - [Code of Conduct](#)
 - [Certificates](#)
- [Service](#)
 - [VACUFLEX® Hose Academy](#)
 - [Dental hoses](#)
- [News](#)
- [Career](#)

- [Deutsch](#)
- [English](#)
- |
- [Chinese](#)

P2 SP-TPR PRO

Thermoplastic rubber ducting with protection shoulder

- high temperature resistant
- protection shoulder
- excellent flexibility

MEDIUM



PROPERTIES



Structure:

Light duty & flexible hose, made of black TPR (TPV - Thermoplastic rubber), with spring steel spiral reinforcement and protection shoulder

Characteristics:

Good temperature resistance, free of halogens and softeners, good chemical resistance, excellent flexibility, good UV-resistance. External abrasion protection profile allows for

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

Increased protection of the hose when dragging, or the vehicles from scratches

Applications:

Transport of hot air and gases in paper processing, plastic industry and vehicle construction

Temperature range:

-40° to + 135° C (short-term 150° C)

Colour:

Black with blue protection shoulder

Specials:

Also available in Flame-retardant version, according to UL 94 V0

I.D. Ø mm	Wall thickness mm	r(mind.) mm	Weight ca. kg/m	Vacuum mbar	Pressure	Bestellnummer
40	0,50	28	0,17	190	0,41	
50	0,50	35	0,22	170	0,32	
60	0,40	42	0,30	160	0,26	
70	0,50	49	0,38	160	0,24	
75	0,50	50	0,43	150	0,22	
80	0,50	56	0,48	150	0,20	
100	0,60	70	0,59	120	0,17	
120	0,60	85	0,71	100	0,14	
125	0,60	88	0,74	100	0,13	
140	0,60	95	0,92	80	0,12	
150	0,60	105	0,99	70	0,09	
175	0,60	123	1,22	50	0,08	
200	0,65	140	1,46	40	0,07	
250	0,65	175	1,65	30	0,06	
300	0,65	210	2,00	30	0,05	
350	0,65	250	2,28	30	0,03	
400	0,65	285	2,60	20	0,02	
450	0,65	320	3,00	20	0,01	
500	0,65	355	3,40	20	0,01	

Further diameters upon request.

State: 30.11.2022

Contact

VACUFLEX GmbH
Hessenring 8 -12
64546 Mörfelden-Walldorf
Germany

T +49 6105 9339 0
F +49 6105 9339 60
info@vacuflex.de


[Imprint](#)
[Data privacy](#)
[Terms of Use](#)



VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022



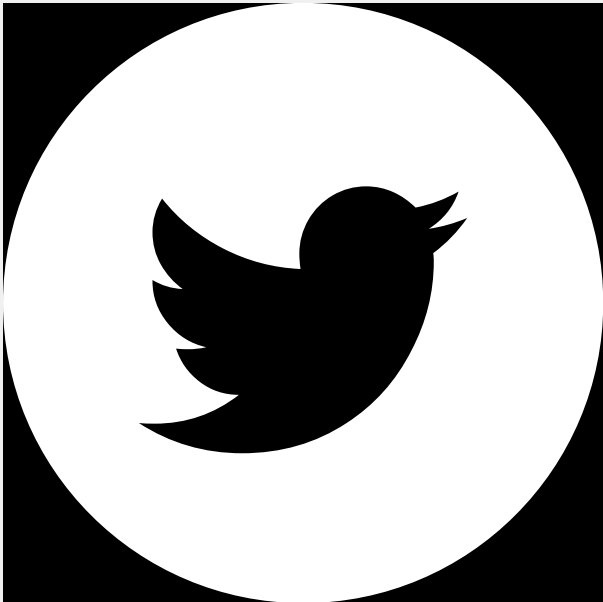

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022



VACUFLEX Advanced Hoses Ltd.
Room 101 of F Building No.2,
Xingye Road, Jiuwangmiao Village,
Zip code 511458, Nansha District,
Guangzhou, China

T +86 20 846 852 37
F +86 20 390 053 10

info@vacuflex.cn
www.vacuflex.cn

Changxing VACUFLEX Hose Technology Co., Ltd

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

Sino-German International Industrial Zone,
Changxing Economic and Technological
Development Zone,
Zip code 313100, Changxing, Huzhou City,
Zhejiang Province, China

T +86 572 6666208
M +86 135 6025 2608
F +86 572 6666207
info@vacuflex.cn
www.vacuflex.cn



Management
System
ISO 9001:2015

www.tuv.com
ID 9000009721

SCHAUBURG HOSE TECHNOLOGY GROUP

© 2022 VACUFLEX GmbH

- [Products](#)
 - [Hoses](#)
 - [Connections](#)
 - [Brochure](#)
- [Company](#)
 - [About us](#)
 - [Sustainability](#)
 - [Code of Conduct](#)
 - [Certificates](#)
- [Service](#)
 - [VACUFLEX® Hose Academy](#)
 - [Dental hoses](#)
- [News](#)
- [Career](#)
- [Imprint](#)
- [Data privacy](#)
- [Terms of Use](#)
- [404](#)

- [de](#)
- [en](#)

- [CN](#)

VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022



VACUFLEX GmbH | Hessenring 8-12
64546 Mörfelden-Walldorf | Germany
Tel. +49 6105 9339 0 | Fax: +49 6105 9339 60
info@vacuflex.de | www.vacuflex.de

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)
Stand: 11/2022

