

## TOIVAC


### Crush recoverable liquid suction & pumping hose

- crush recoverable
- high vacuum resistance
- excellent flexibility even at low temperatures

#### MEDIUM



#### PROPERTIES

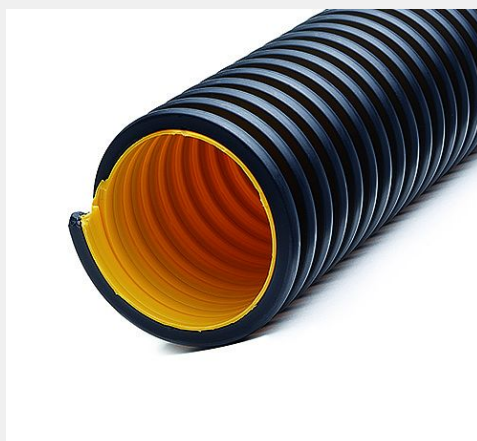

#### Structure:

Self supporting double profile hose, made out of Polyethylene (PE), yellow black

#### Characteristics:

Crush recoverable, excellent chemical resistance, excellent vacuum resistance, rot-proved. Excellent flexibility despite temperature conditions, floatable

#### Applications:

Suction of liquids in sanitary and sewer applications, for waste water disposal , for airport services

#### Temperature range:

-40°C up to +60°C

#### Colour:

Black and Yellow

#### Specials:

With tight welded cuffs on both ends

I.D. Ø mm	Wall thickness mm	r(min.) mm	Weight ca. kg/m	Vacuum mbar	Pressure	Bestellnummer
51	1,4	85	0,95	0	-	5084051
63	1,4	105	1,15	0	-	5084063
76	1,4	125	1,40	0	-	5084076
102	1,4	165	1,80	0	-	5084102

Further diameters upon request

State: 20.04.2024