

VSM-POOL


Inside smooth full plastic
hose with low flow resistance

- good resilience
- excellent flexibility
- light construction

MEDIUM



PROPERTIES

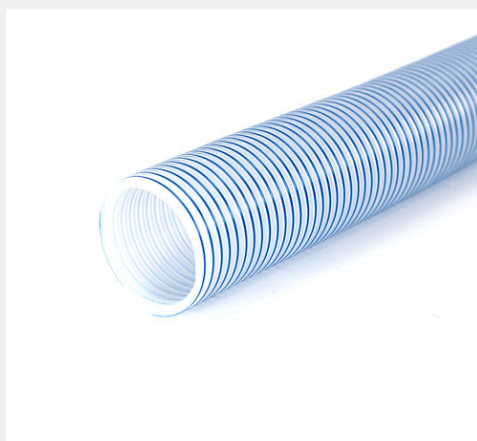

Structure:

Modified TPO

Characteristics:

Inside smooth full plastic hose with low flow resistance, good resilience (crush proofed), floatable and excellent flexibility

Applications:

Cleaning of swimming pools, filter technology

Temperature range:

-50°C up to +60°C

Colour:

Translucent with blue shoulder, other colours on request

Specials:

Screw cuffs available

I.D. Ø mm	O.D. Ø mm	Wall thickness mm	r (mind.) mm	Weight ca. kg/m	Vacuum mbar	Pressure bar	Part no.
32	40,5	-	80	0,221	500	0,50	4-1100-032-01
38	48,0	-	95	0,322	400	0,40	4-1100-038-01
50	61,0	-	120	0,425	250	0,25	4-1100-050-01
51	62,0	-	122	0,435	250	0,25	4-1100-051-01

Further diameters upon request.

State: 19.04.2024